


ALP-2000

| REV | DESCRIPTION | PREP BY/DATE | CHECK BY/DATE |
|-----|-------------|--------------|---------------|
| | | | |

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 RES-Q-JACK INC. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 RES-Q-JACK INC. IS
 PROHIBITED.

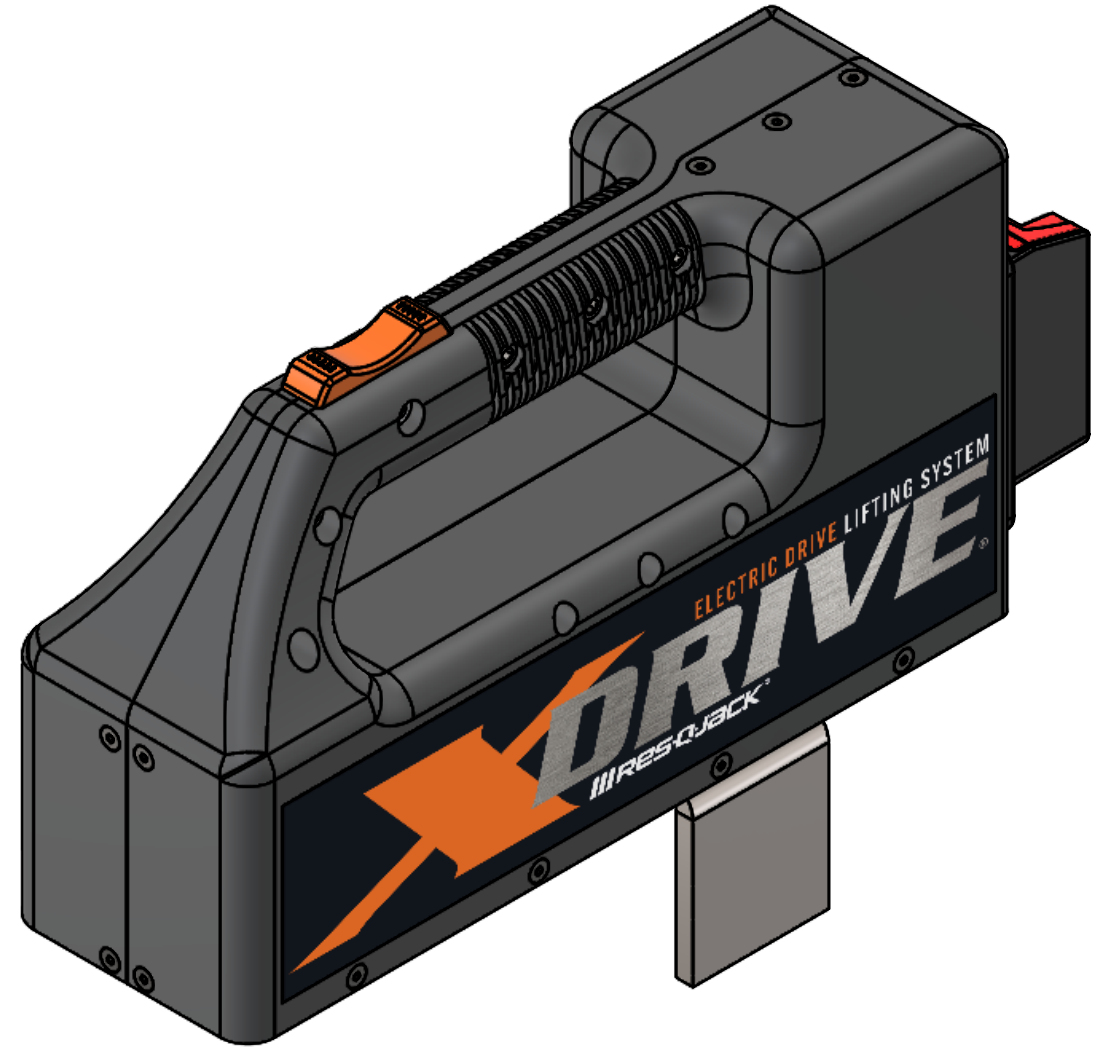

LOAD LIMIT 6000 LBS
 AVERAGE LIFT RATE: 6.5"/MIN
 CURRENT LIMITED BOARD; 32AMP
 HIGH TORQUE PLANETARY GEAR MOTOR
 MILWALKEE 18V
 OR
 DEWALT 20V
 OR
 MAKITA 18V
 5 WATT WORKING AREA LIGHTING WHEN BATTERY ATTACHED
 MAGNETIC HOLD TO JACK
 ADDITIVE MANUFACTURED NYLON 12 POLYMER
 ALUMINUM AND STEEL FRAME
 STAINLESS STEEL HARDWARE
 ~10.7LB WITHOUT BATTERY

| | | | | |
|--|------------|--|--|--|
| MATERIAL: | | RES-Q-JACK | | |
| DIMENSIONING AND TOLERANCING UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/32 ANGULAR: MACH ± 0° 30', BEND ± 1° TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005 | | TITLE: X-DRIVE DWG. NO. ALP-2000 SCALE: 1:4 SIZE: B SHEET 1 OF 1 | | |
| FINISH: | | INTERPRET DRAWING PRACTICES IN ACCORDANCE WITH ASME Y14.100. | | |
| HEAT TREAT: | | INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ASME Y14.5-1994. | | |
| ENG./DATE: | MFG./DATE: | OTHER/DATE: | | |
| NICK H | | | | |